




PRO SERIES

EMBOSSER 2000

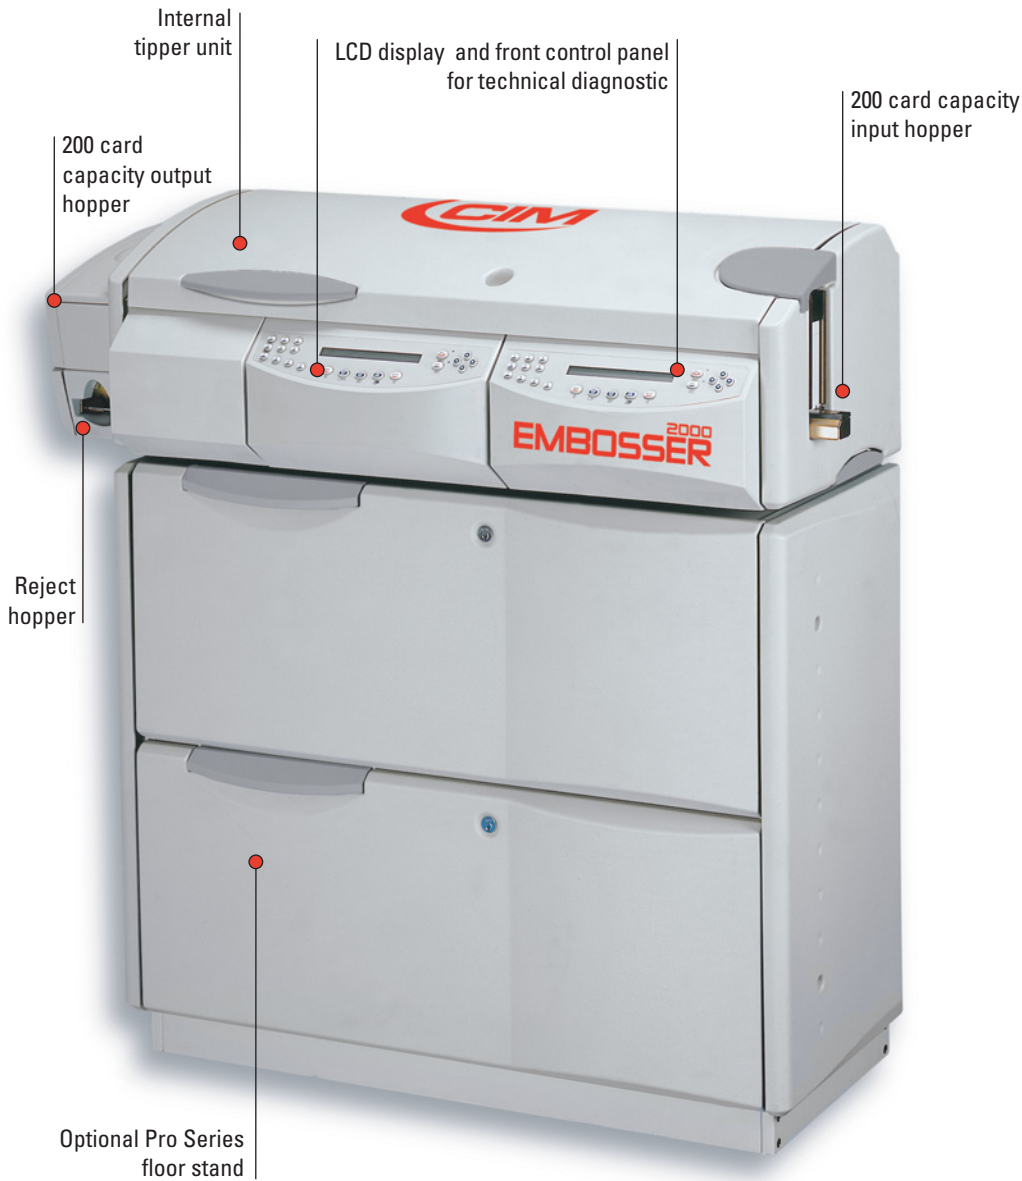

FEATURES

standard



optional



USED BY

BANKS/CREDIT INSTITUTIONS
 INSURANCE COMPANIES
 CASINOS
 CLUBS/ASSOCIATIONS
 GOVERNMENT OFFICES
 DEPARTMENT STORES
 SERVICE BUREAUS


IDEAL FOR

CREDIT CARDS AND OTHER FINANCIAL CARDS*
 ID CARDS
 RFID CARDS
 GIFT CARDS
 PREPAID CARDS
 * COMPATIBLE WITH MOST 3RD PARTY EMV PERSONALIZATION SOFTWARE SOLUTIONS

IN LINE SOLUTIONS

MULTIFEEDER 6000
 THERMAL 1000/2000
 INSERTER 3000

SOFTWARE




INCLUDED

HIGH SPEED CARD EMBOSSING

HEAVY DUTY PERFORMANCE

210 character capacity
 Dual infill for front and rear in one pass
 Magnetic Stripe encoding (JIS/ISO)
 Regular VISA + VISA Mini Card encoding
 Smart Card Contact and Contactless unit







PRO SERIES

EMBOSSER 2000

TECHNICAL FEATURES



EMBOSSER 2000



CARD & FEEDER

dimensions	CR80 - ISO standard
thickness	0.76 ± 0.08 mm / 30 ± 3.15 mil
materials	ABS, PVC and composite. Semi transparent PET-G available on request
input hopper	200 card capacity
output hopper	200 card capacity with FIFO (first in – first out) technology; reject hopper 10 card capacity

EMBOSSING

technology	Embossing or Indent
drum capacity	2 x 105 characters drums
characters	Standard Gothic, OCR7B, country specific characters (optional), Braille drum/types (optional), etc.
embossing area	9 lines x 31 characters (76 x 45 mm area / 3 x 1.77 in)
internal tipper unit	off-line tipping option (76 x 41 mm area / 3 x 1.61 in). Ribbon saving function
infill unit	options: single or dual infill Dual infill (drum 1) is a device for front (i.e. OCRB1/B4 fonts) and rear (i.e. CVV2 - OCRA1) infill embossing in one pass
performance	Up to 800 CPH depending on the job

ENCODING OPTIONS

magnetic encoding	optional: 3 ISO 7811 tracks, LoCo, HiCo, JIS optional: regular VISA + VISA Mini Card (paired)
smart card unit	optional: contact and contactless

COMMUNICATION INTERFACE & SOFTWARE

communication interf.	RS232 serial port
operating system	Multicard 2006 compatible with Windows 2000/XP/Vista
application program	User interface monitoring, card production control, automatic card remake option, pre-encoded card and smart card reading with complete processing operation, database connection, system status and help messages displayed on PC available on request
SDK option	available on request

HARDWARE

power supply	100 - 117 - 220 - 230 or 240 Volts - 50/60 Hz
operating environment	10 ÷ 35 °C / 50 ÷ 95 °F
dimensions (WxDxH)	1200 x 480 x 350 mm / 47.2" x 18.9" x 13.8"
weight	80 kg / 177 lbs
floor stand	optional (required for in-line operation)

PRO SERIES MULTI MODULAR SYSTEM - The Pro Series units can operate stand alone or in in-line configuration with up to 4 modules. The EMBOSSER 2000 can be connected to: MULTIFEEDER 6000, THERMAL 1000/2000, INSERTER 3000. The modular concept of the hardware with the easy-to-use MultiCard 2006 software makes the PRO SERIES a unique scalable system for complete card personalization.

RELIABLE - The E2000 combines heavy duty performance with easy integration in any working environment. A step forward in complete and fast plastic card personalization.

FAST & FLEXIBLE - The high productivity is a result of the 2 embossing drums with a total of 210 character capacity, and the MSP (Multi Smart Processing) system. Thanks to these devices, the E2000 can process up to 4 cards simultaneously and personalize cards with many different character types.

VERSATILE - The E2000 belongs to a tested CIM product range and can manage embossing, infill and tipping, magnetic stripe and / or contact and contactless smart card encoding into one single card flow. Furthermore, the EMBOSSER 2000 can be configured with special embossing characters to personalize international credit cards, such as VISA and MasterCard (also with country specific characters), and perform dual infill personalization of the front and back simultaneously.



MF Group SpA - CIM division

HEADQUARTERS/OFFICES: Loc. Braine, 54/A - 40036 Rioveggio (BO) - Italy - Tel. +39 051 6776 611 - Fax +39 051 6776 612

FACTORY: Via O. Serra, 2 - 40012 Calderara di Reno (BO) - Italy - Tel +39 051 6465 011 - Fax +39 051 6465 012

www.cimitaly.it - info@cimitaly.it

Data subject to change without notice. All stated trademarks belong to their respective owners. ENG_Rev.02-08/07